

IDROBOX PLUS



CATALOGUE 08



IDROBOX PLUS IP55 controls and housings without transparent sheath

- ALL PROBLEMS OF THE SHEATH BREAKING, AND OF DIRT, HAVE BEEN ELIMINATED
- MAXIMUM LONG TERM RESISTANCE TO WEATHER CONDITIONS
- IMPROVED ERGONOMIC DESIGN: DIRECT CONTROL OPERATION





IDROBOX PLUS IP66 enclosure: protection with plug connected



■ The **IP66 container** is suitable for installation on TIPLUG switchboards, thus resolving the problem of the switchboard protection downgrading when devices with civil plugs are used.





IDROBOX PLUS IP55 controls and housings without transparent sheath For installations in the home.

EXAMPLES OF INSTALLATION LOCATIONS

GATE:

- pushbutton



OFF-DOOR:

- nameplate pushbutton



CELLAR AND BOX COMMON AREAS:

- 2 module housing for MÀTIX sockets
- two-way switch or pushbutton



■ BOX AND CELLAR:

 enclosure with: two-way switch + 2 module housing for MATIX sockets



IDROBOX PLUS IP66 protection with plug connected

EXAMPLES OF INSTALLATION LOCATIONS



- outdoor:



- INDUSTRIAL/SERVICE SECTOR:
 - single load power supply
 - mounting on **TIPLUG** switchboard




■ BUILDING SITE:

- mounting on **TIPLUG** ASC switchboard





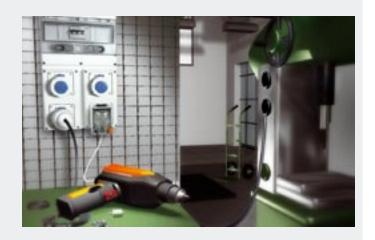



IDROBOX PLUS Installation solutions

■ IP55 SOLUTIONS

IP55 pushbutton, two-way switch:

Complete and ready to use configurations

IP55 housing:

Enclosure must be completed with MÀTIX devices



■ IP66 SOLUTIONS

 The container must be completed using MÀTIX devices

 IP66 protection is guaranteed with only one output cable



Two versions:
 Item 26066 wall-mounting
 Item CQ26066 to be installed on TIPLUG switchboards



Wall-mounting version

Version for TIPLUG switchboards

IDROBOX PLUS Catalogue




IP55 ITEMS		
Item	Description	
26003	wall-mounting two-way switch 16A 250 V a.c. with axial movement, backlit with LED item H4743B/230 (to be purchased separately)	
26005	wall-mounting pushbutton 10A 250 V a.c. with axial movement, backlit with LED item H4743B/230 (to be purchased separately)	
26055	wall-mounting housing for MÀTIX devices – capacity 2 modules – IP55 is guaranteed when the door is closed	
26200	monobloc wall-mounting 2 module enclosure, fitted with two-way switch and IP55 housing - Can be installed both horizontally and vertically. Two-way switch: 16A 250 V a.c. with axial movement, backlit with LED item H4743B/230 (to be purchased separately). Housing: for MÀTIX devices – capacity 2 modules.	
26108L	nameplate pushbutton 10A 250 V a.c. backlit with LED	
26108N	technology (already installed) – can be installed on 503E,	
26108T	502E, 502 flush-mounting boxes - 3 finishes: LIVING (item 26108L), LIGHT (item 26108N), LIGHT TECH (item 26108T)	

NOTE: IDROBOX - PLUS items are compatible with IDROBOX accessories

	IP66 ENCLOSURES	
Ite	m	Description
26066		enclosure for MÀTIX sockets (German standard, 2-centre, RJ) – capacity 2 modules. Guaranteed protection degree: IP66, with the plug connected and the lid closed - for wall-mounting installation
CQ	26066	As above - for installation on TIPLUG switchboards

Dimensional data

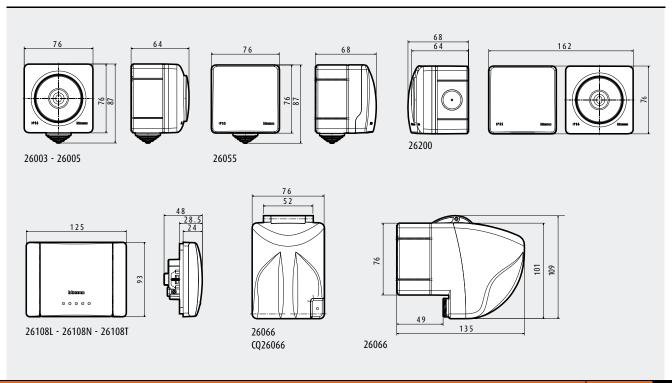



BTicino SpA Via Messina, 38 20154 Milano - Italy www.bticino.it