

Explosion protected switchgear

CROUSE-HINDS
SERIES



GHG 981 Ex-Safety switch for zone 22

GRP, Stainless steel, and painted steel enclosures for harsh environments



EATON

Powering Business Worldwide

GHG 9810048 Ex-Safety Switches for Zone 22

Rated current from 25 A - 500 A

Safety first

Occupational safety always has top priority! For this reason, whenever it is necessary to carry out maintenance, cleaning or repair work, it must be possible to isolate machines and installations from the electrical power supply in an absolutely safe and reliable way. Normally this is realised by switch-disconnectors (safety-switches) according to **IEC/EN 62626-1**.

The GHG981 safety switches approved for use in zone 22 are as containing explosive dust fulfil all these requirement. With the built-in padlocking facilities, they can be used as a load break switch with full confidence they will provide the required safety and personnel protection.

In what applications is IEC 62626-1 compliance required?

This standard applies to various applications to provide isolation of electrical equipment, namely motor circuits. Switch-disconnectors used in these applications are commonly known as *"safety switches," "repair- and maintenance switches,"* or *"isolators"* and are placed in close proximity to the equipment. Position switches, inspection switches, and other switches are not covered by this standard.

For any application

GHG 981 0048 series safety switches up to 500 A. meet the strict requirements of class I IEC/EN 62626-1.

Emergency stop versions according to EN 60204-1

Optional emergency stop versions to EN 60204-1 featuring a red handle with a yellow backplate are also available. The additional leading or lagging auxiliary contact guarantees double safety for extreme switching conditions. All switch versions feature an earth terminal.

Special features of the safety switches include designs for ease of installation and readily accessible connection terminals.

Safety switches rated 100 A and below are available in all 3 material types while those 160 A and above are built into enclosures made of powder-coated sheet steel or electropolished stainless steel. These enclosures can be fitted with screw-on flanges.


Enclosed Switch-Disconnectors to provide isolation during repair and maintenance.

GHG 26 switches (10-180 A) and GHG 981 switches (25- 500 A) are now confirmed to comply with the new standard IEC 62626-1, requirements Class 1.

The new standard IEC 62626-1 defines the requirements for safety switches (switch-disconnectors) that are used to provide isolation of equipment during repair and maintenance. These requirements go above and beyond those of IEC 60947-3, where no standard previously existed.

The standard divides products into two classifications: Class 0 for general use and Class 1 for harsh and rough/heavy duty conditions.

All products installed in ATEX/IECEx hazardous areas should be rated for Class 1. Class 1 requirements include minimum ratings for mechanical strength, IP protection, tamper resistance, heat/vibration/corrosion resistance, switching capacity, and locking capability.

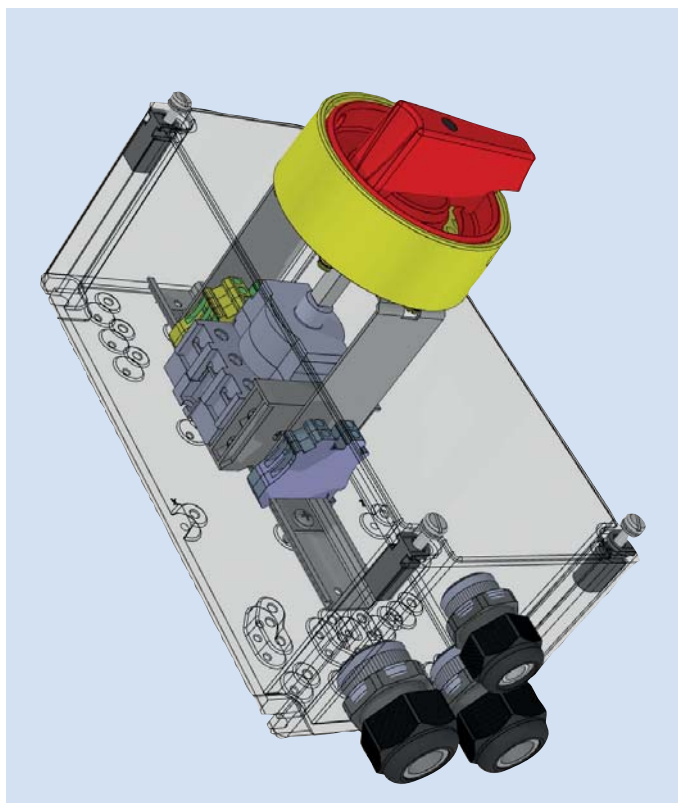

Features

- Approved for use in Zone 22 explosive dust atmospheres and for industrial applications
- For max. currents from 25A up to 500A
- AC3 and AC23 switching capacity
- Environmental protection to IP66
- Compliance with IEC / EN 62626-1
- Wide temperature range from -55°C to +55°C
- Can be locked in "OFF" position by max. 3 padlocks



The right size for every application

The switches are available in 3-pole, 4-pole, and 6-pole versions in sizes ranging from 25 A to 400 A. The 500 A switch is available in 3-pole or 4-pole versions.

All sizes from 25 A through 500 A feature full AC3 switching capacity for squirrel-cage motors during starting or while running per EN 60947-3 Appendix A. This is the most typical industrial application for motors.

Ready for harsh environments

The enclosures for our GHG 981 safety switches are designed with IP66 environmental protection and are available in powder-coated sheet steel, glass-reinforced polyester (GRP), or electro-polished stainless steel. They are impact resistant and robust, corrosion-resistant, and are suitable for use in harsh industrial environments with extreme ambient temperatures from -55 °C to +55 °C.

Lock-out/tag-out capability

All GHG981 safety switches come with built-in lock-out/tag-out capability and can be locked in the "OFF" position by means of max. 3 padlocks. While switched to the "OFF" position, the enclosure covers of safety switches cannot be opened without destroying the enclosure. This provides an extra level of safety as it prevents access to a switch locked in the "OFF" position, eliminating any risk of tampering with the switch position or electrical connections.

Electrical equipment for use in areas with combustible dust

Combustible dust can be ignited by electrical apparatus in various ways:

- by apparatus surface temperatures that are higher than the ignition or glow temperature of the respective dust. The temperature at which the dust ignites is dependent on the properties of the dust, on whether it is present in the form of a cloud or deposits, on the thickness of the layer and on the type of heat source
 - by sparks at electrical parts such as switches, contacts, commutators, brushes or similar
 - by the discharge of stored electrostatic energy
 - by radiated energy (e.g. electromagnetic radiation)
 - by magnetic impact or friction sparks or a rise in temperature originating from the apparatus.
- To avoid ignition hazards, it is necessary that:
- the temperature of any surfaces on which dust deposits can form or that can come into contact with a cloud of dust are kept at a temperature that is lower than the limiting temperatures laid down in EN 50028-1-2
 - all parts with electric sparks or with temperatures above the ignition or glow temperature of the dust are built into an enclosure that prevents the ingress of dust in a suitable manner, or
 - the energy of the electric circuits is limited to such a degree, that sparks or temperature that could ignite combustible dust are avoided
 - all other ignition sources are avoided.



GHG 9810048 Ex Safety switch for Zone 22



40 A sheet steel



40 A plastic



25 A stainless steel



25 A plastic

Technical Data

GHG 981...						
Marking to 2014/34/EU	Ⓔ II 3 D Ex tc IIIC T80°C Dc					
Type Examination Certificate	CCH 15 ATEX 1001					
Permissible ambient temperature	-55 °C up to +40 °C/45 °C/50 °C/55 °C see instruction manual					
IK-class according to EN 50102	IK 9 =^ 10 J					
Rated voltage	up to 690 V					
Rated current	see ordering information					
Frequency	50 - 60 Hz					
Switch-disconnector for maintenance accd. to IEC 62262-1	Class 1 (25 A - 500 A)					
Protection class	I and II					
Degree of protection accd. to EN 60529	IP66					
Auxiliary contact	1 x NO making - lagging, breaking - leading 1 x NC making - leading, breaking - lagging					
Padlocking	can be logged in OFF position with 3 commercially padlocks					
Enclosure colour	Plastic = black / sheet steel = RAL 7032 / stainless steel 316L = electro-polished					
	GHG 981 (25 A)	GHG 981 (40 A)	GHG 981 (80 A)			
Back-up fuse	up to 415 V AC 50 A gG	up to 690 V AC 35 A gG	up to 415 V AC 80 A gG	up to 690 V AC 80 A gG	up to 415 V AC 100 A gG	up to 690 V AC 100 A gG
Rated making-/breaking capacity AC-3 accd. to EN 60947-3 Appendix A	25 A / 3 pole 23 A / 4/6 pole	14 A / 3 pole 14 A / 4/6 pole	40 A / 3 pole 40 A / 4/6 pole	22 A / 3 pole 17 A / 4/6 pole	71 A / 3 pole 55 A / 4/6 pole	23 A / 3 pole 17 A / 4/6 pole
Connecting terminals	2.5 mm² - 6 mm²		10 mm² - 35 mm²		25 mm² - 70 mm²	
	GHG 981 (100 A)	GHG 981 (160 A)	GHG 981 (250 A)			
Back-up fuse	up to 415 V AC 125 A gG	up to 690 V AC 125 A gG	up to 415 V AC 250 A gG	up to 690 V AC 250 A gG	up to 415 V AC 250 A gG	up to 690 V AC 250 A gG
Rated making-/breaking capacity AC-3 accd. to EN 60947-3 Appendix A	100 A	100 A	160 A	160 A	250 A	250 A
Connecting terminals	35 mm² - 70 mm²		70 mm² - 95 mm²		120 mm² - 185 mm²	
	GHG 981 (400 A)	GHG 981 (500 A)				
Back-up fuse	up to 415 V AC 630 A gG	up to 690 V AC 630 A gG	up to 415 V AC 630 A gG	up to 690 V AC 630 A gG		
Rated making-/breaking capacity AC-3* accd. to EN 60947-3 Appendix A	400 A	400 A	500 A	500 A		
Connecting terminals	1 x 240 mm²		2 x 185 mm² - 2 X 240 mm²			

GHG 9810048 - Ex-safety switches for Zone 22



80 A 3-pole plastic



80 A 6-pole sheet steel



100 A 3-pole plastic



100 A 6-pole stainless steel

Ordering details GHG 981 25 A - 100 A

Rated current	Poles	Enclosure material	Cable entry (metal thread)	Cable glands (plastic)	Enclosure sizes: GRP				Enclosure sizes: metall				Order No. ¹⁾
					Size 1	Size 2	Size 3	Size 4	Size 1	Size 2	Size 3	Size 4	
GHG 981 (25 A)													
25 A	3 pole	GRP		2xM32, 1xM25	X								GHG 981 0048 R1211
25 A	4 pole	GRP		2xM32, 1xM25	X								GHG 981 0048 R1212
25 A	6 pole	GRP		4xM32, 1xM25		X							GHG 981 0048 R1213
25 A	3 pole	Sheet steel, powder-coated	2xM32, 1xM25						X				GHG 981 0048 R1214
25 A	4 pole	Sheet steel, powder-coated	2xM32, 1xM25						X				GHG 981 0048 R1215
25 A	6 pole	Sheet steel, powder-coated	4xM32, 1xM25						X				GHG 981 0048 R1216
25 A	3 pole	316L stainless steel, electro-polished	2xM32, 1xM25						X				GHG 981 0048 R1217
25 A	4 pole	316L stainless steel, electro-polished	2xM32, 1xM25						X				GHG 981 0048 R1218
25 A	6 pole	316L stainless steel, electro-polished	4xM32, 1xM25						X				GHG 981 0048 R1219
GHG 981 (40 A)													
40 A	3 pole	GRP		2xM40, 1xM25			X						GHG 981 0048 R1221
40 A	4 pole	GRP		2xM40, 1xM25			X						GHG 981 0048 R1222
40 A	6 pole	GRP		4xM40, 1xM25			X						GHG 981 0048 R1223
40 A	3 pole	Sheet steel, powder-coated	2xM40, 1xM25							X			GHG 981 0048 R1224
40 A	4 pole	Sheet steel, powder-coated	2xM40, 1xM25							X			GHG 981 0048 R1225
40 A	6 pole	Sheet steel, powder-coated	4xM40, 1xM25							X			GHG 981 0048 R1226
40 A	3 pole	316L stainless steel, electro-polished	2xM40, 1xM25							X			GHG 981 0048 R1227
40 A	4 pole	316L stainless steel, electro-polished	2xM40, 1xM25							X			GHG 981 0048 R1228
40 A	6 pole	316L stainless steel, electro-polished	4xM40, 1xM25							X			GHG 981 0048 R1229
GHG 981 (80 A)													
80 A	3 pole	GRP		2xM50, 1xM25			X						GHG 981 0048 R1231
80 A	4 pole	GRP		2xM50, 1xM25			X						GHG 981 0048 R1232
80 A	6 pole	GRP		4xM50, 1xM25				X					GHG 981 0048 R1233
80 A	3 pole	Sheet steel, powder-coated	2xM50, 1xM25								X		GHG 981 0048 R1234
80 A	4 pole	Sheet steel, powder-coated	2xM50, 1xM25								X		GHG 981 0048 R1235
80 A	6 pole	Sheet steel, powder-coated	4xM50, 1xM25								X		GHG 981 0048 R1236
80 A	3 pole	316L stainless steel, electro-polished	2xM50, 1xM25								X		GHG 981 0048 R1237
80 A	4 pole	316L stainless steel, electro-polished	2xM50, 1xM25								X		GHG 981 0048 R1238
80 A	6 pole	316L stainless steel, electro-polished	4xM50, 1xM25								X		GHG 981 0048 R1239
GHG 981 (100 A)													
100 A	3 pole	GRP		2xM50, 1xM25			X						GHG 981 0048 R1241
100 A	4 pole	GRP		2xM63, 1xM25				X					GHG 981 0048 R1242
100 A	6 pole	GRP		4xM50, 1xM25				X					GHG 981 0048 R1243
100 A	3 pole	Sheet steel, powder-coated	2xM50, 1xM25								X		GHG 981 0048 R1244
100 A	4 pole	Sheet steel, powder-coated	2xM63, 1xM25								X		GHG 981 0048 R1245
100 A	6 pole	Sheet steel, powder-coated	4xM50, 1xM25								X		GHG 981 0048 R1246
100 A	3 pole	316L stainless steel, electro-polished	2xM50, 1xM25								X		GHG 981 0048 R1247
100 A	4 pole	316L stainless steel, electro-polished	2xM63, 1xM25								X		GHG 981 0048 R1248
100 A	6 pole	316L stainless steel, electro-polished	4xM50, 1xM25								X		GHG 981 0048 R1249

¹⁾ For an emergency stop switch (red handle/yellow back plate), change the 3rd to last digit from R*2** (standard version) to R*3** (emergency stop)

GHG 9810048 - Ex-safety switches for Zone 22



GHG 981 (400 A)



GHG 981 (400 A)

Ordering details GHG 981 160 A - 700 A

Rated current	Poles	Enclosure material	Cable entry (metal thread)	Cable glands (plastic)	Enclosure sizes: GRP				Enclosure sizes: metall				Order No. ¹⁾	
					Size 1	Size 2	Size 3	Size 4	Size 1	Size 2	Size 3	Size 4		
GHG 981 (160 A)														
160 A	3 pole	Sheet steel, powder-coated	2xM63, 1xM25									X	GHG 981 0048 R1254	
160 A	4 pole	Sheet steel, powder-coated	2xM63, 1xM25									X	GHG 981 0048 R1255	
160 A	6 pole	Sheet steel, powder-coated	4xM50, 1xM25									X	GHG 981 0048 R1256	
160 A	3 pole	316L stainless steel, electro-polished	2xM63, 1xM25									X	GHG 981 0048 R1257	
160 A	4 pole	316L stainless steel, electro-polished	2xM63, 1xM25									X	GHG 981 0048 R1258	
160 A	6 pole	316L stainless steel, electro-polished	4xM50, 1xM25									X	GHG 981 0048 R1259	
GHG 981 (250 A)														
250 A	3 pole	Sheet steel, powder-coated	2xM63, 1xM25										X	GHG 981 0048 R1264
250 A	4 pole	Sheet steel, powder-coated	2xM63, 1xM25										X	GHG 981 0048 R1265
250 A	6 pole	Sheet steel, powder-coated	4xM63, 1xM25										X	GHG 981 0048 R1266
250 A	3 pole	316L stainless steel, electro-polished	2xM63, 1xM25										X	GHG 981 0048 R1267
250 A	4 pole	316L stainless steel, electro-polished	2xM63, 1xM25										X	GHG 981 0048 R1268
250 A	6 pole	316L stainless steel, electro-polished	4xM63, 1xM25										X	GHG 981 0048 R1269
GHG 981 (400 A)														
400 A	3 pole	Sheet steel, powder-coated	2xM63, 1xM25										X	GHG 981 0048 R1274
400 A	4 pole	Sheet steel, powder-coated	2xM63, 1xM25										X	GHG 981 0048 R1275
400 A	6 pole	Sheet steel, powder-coated	4xM63, 1xM25										X	GHG 981 0048 R1276
400 A	3 pole	316L stainless steel, electro-polished	2xM63, 1xM25										X	GHG 981 0048 R1277
400 A	4 pole	316L stainless steel, electro-polished	2xM63, 1xM25										X	GHG 981 0048 R1278
400 A	6 pole	316L stainless steel, electro-polished	4xM63, 1xM25										X	GHG 981 0048 R1279
GHG 981 (500 A)														
500 A	3 pole	Sheet steel, powder-coated	4xM80, 1xM25										X	GHG 981 0048 R1284
500 A	4 pole	Sheet steel, powder-coated	4xM80, 1xM25										X	GHG 981 0048 R1285
500 A	3 pole	316L stainless steel, electro-polished	4xM80, 1xM25										X	GHG 981 0048 R1287
500 A	4 pole	316L stainless steel, electro-polished	4xM80, 1xM25										X	GHG 981 0048 R1288


¹⁾ For an emergency stop switch (red handle/yellow back plate), change the 3rd to last digit from R*2** (standard version) to R*3** (emergency stop)

Accessories


Type	Version	
Cable glands		
Plastic cable glands	M20 up to M63	see: Main catalogue part 2 - page 2.3.4 - 2.3.11
Metal cable glands	ADE 1 F2/ ADE 4F, 5F and 6F	see: Main catalogue part 2 - page 2.3.12 - 2.3.19

Dimension drawing


Size 1 GRP enclosure

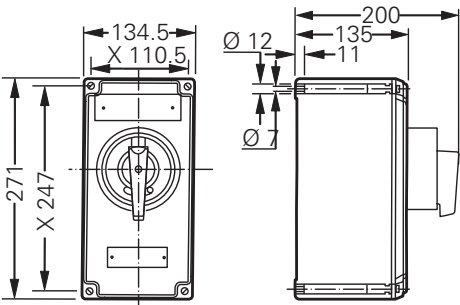


Size 1 metal enclosure

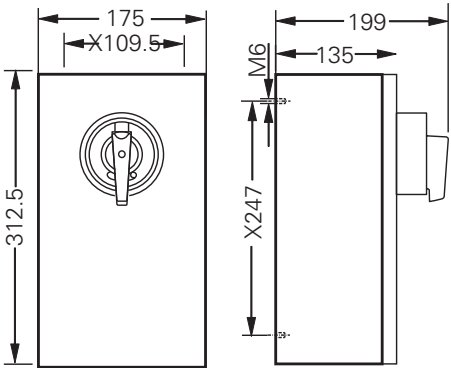


Size 2 GRP enclosure

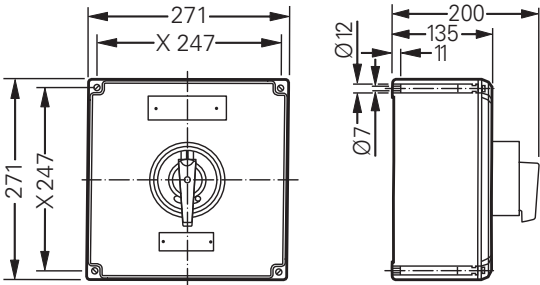


Size 2 metal enclosure

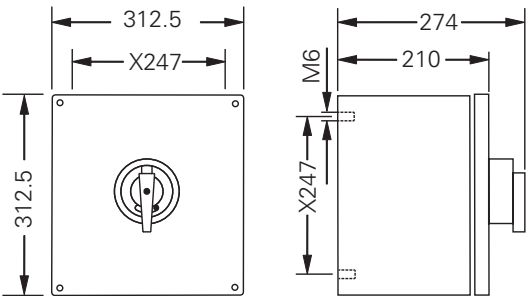


Size 3 GRP enclosure

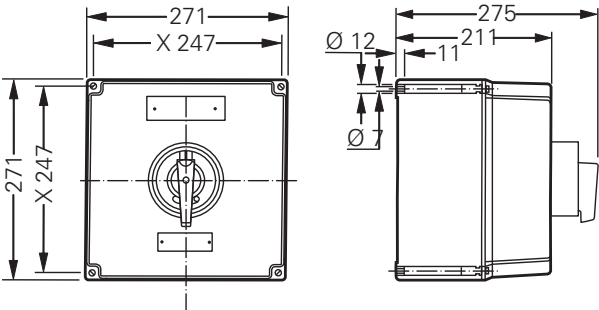


Size 3 metal enclosure

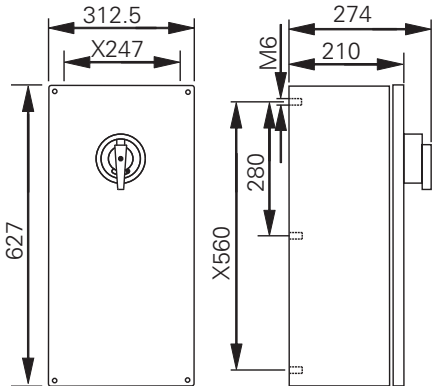

Size 4 GRP enclosure

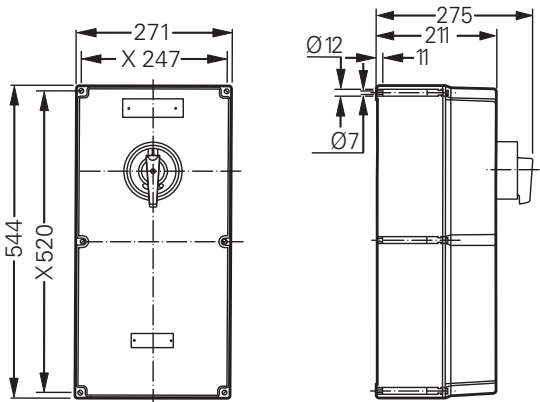

Size 4 metal enclosure

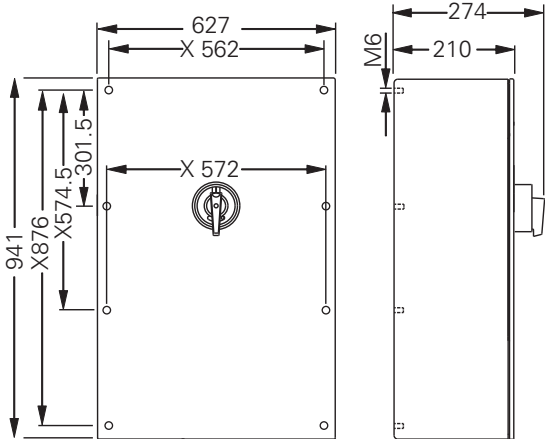

Dimensions in mm



Eaton's Crouse-Hinds Division

The safety you rely on.

See the complete offering of Hazardous and Industrial Products at www.crouse-hinds.de.

**U.S. (Global Headquarters):
Eaton's Crouse-Hinds
Business**

1201 Wolf Street
Syracuse, NY 13208

(866) 764-5454
FAX: (315) 477-5179
FAX Orders Only:
(866) 653-0640

CrouseCustomerCTR@Eaton.com

For more information:

If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

Australia

Phone +61-2-8787-2777
Fax +61-2-9609-2342
crousehindsanz@eaton.com

China

Phone +86-21-2899-3600
Fax +86-21-2899-4055
ECHsales@eaton.com

Great Britain

Phone +44-247-630-89 30
Fax +44-247-630-10 27
sales5@eaton.com

India

Phone +91-124-4683888
Fax +91-124-4683899
cchindia@eaton.com

Canada

Toll Free +1-800-265-0502
Fax +1-800-263-9504
Fax orders only:
+1-866-653-0645

Korea

Phone +82-2-3484-6783
Fax +82-2-3484-6778
CCHK-sales@cooperindustries.com

**Mexico/Latin America/
Caribbean**

Phone +52-555-804-4000
Fax +52-555-804-4020
ventascentromex@eaton.com

Spain

Phone +34-9-37362710
Fax +34-9-37835055
sales.CCH.es@cooperindustries.com

Middle East (Dubai)

Phone +971-4-427-2522 / 2500
Fax +971-4-429-8521
CHMEsales@Eaton.com

The Netherlands

Phone +31-10-2452145
Fax +31-10-2452121
CHRD_mail@Eaton.com

Norway

Phone +47-32-244600
Fax +47-32-244646
CHLlooffice@eaton.com

Singapore:

Phone +65-6645-9888
Fax +65-6297-4819
CHSI-Sales@Eaton.com

Turkey

Phone +90-216-464-20-20
Fax +90-216-464-20-10
infoEGTurkey@eaton.com

Russia

Phone +7-495 510-24-27
Fax +7-495 510-24-28
info@cooper.ru.com
www.cooper-russia.ru

Eaton's Crouse-Hinds Business

Neuer Weg – Nord 49
D-69412 Eberbach

Phone +49 (0) 6271/806-500
Fax +49 (0) 6271/806-476
E-mail info-ex@eaton.com
Internet www.crouse-hinds.de

Eaton

1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2021 Eaton Corporation
All Rights Reserved
Printed in Germany
Publication No. BR 300 8000 XXXX
April 2021

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton's Crouse-Hinds Business

1201 Wolf Street
Syracuse, NY 13208
(866) 764-5454
CrouseCustomerCTR@Eaton.com

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Powering Business Worldwide